


PowerLux® Architectural LED Wall Flood Luminaire

Catalog#		Type
Project		
Note		Date
Prepared by		



Front view

FIXTURE DIMENSIONS

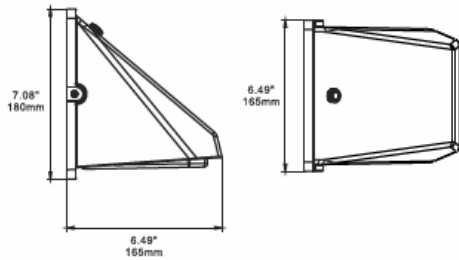

IES FILE PHOTOMETRIC DATA

Available upon request



Side view

ORDERING INFORMATION

Model No.	Wattage	Lumens	Color Temp	Input Voltage
PLEDAWF	14W	910	5000K	120-240V

Part Number Example: PLEDAWF/910/750/120-240

Description: PowerLux Architectural LED Wall Flood Luminaire 14W, 910lm, 5000K, 120-240V

PowerLux® Corporation

U.S. Manufacturer of Sustainable Energy Efficient Lighting Products

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: www.powerlux.com E-mail: klpowerlux@gmail.com

Based on prevailing model. Efficiency of ballast and efficacy of LED modules are ever improving. Please contact [PowerLux®](http://www.powerlux.com) for latest updated information.

PowerLux® Products Have Stood the Test of Time!

APPLICATIONS

For hotels, entry-ways, condos, apartments and porches

SPECIFICATION FEATURES

- Suitable for indoor and outdoor use
- Corrosion resistant die-cast aluminum housing; powder coated finish
- Stainless steel hardware
- High impact prismatic frosted polycarbonate lens
- Silicone gasket
- Optional photo control
- IP66; UL listed
- Quick mount installation

LED SYSTEM FEATURES

- Highest quality long life LEDs
- Thermally designed for long life using Cree LED
- 14W (system wattage), 910 delivered lumens
- Efficacy: 65lm/w
- Low starting temp -30°C
- CRI > 75
- Color temperature 5000K
- Input voltage: 120-240V AC
- IC current controlled LED circuits