


PowerLux® iLaurel™ Induction Retrofit Kit



55W Induction 100-120V, 200-277V
85W Induction 100-120V, 200-277V

DIMENSIONS

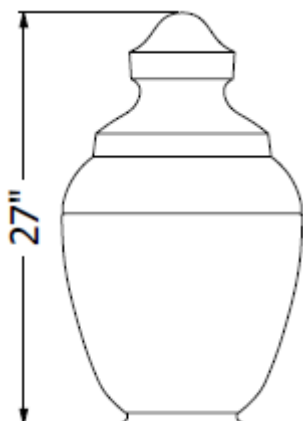

Metalized reflector

IES FILE PHOTOMETRIC DATA

Available on request

PACKING DATA

26"x18"x18" Weight 15 lbs

Catalog#		Type
Project		
Note		Date
Prepared by		

APPLICATIONS

- For use with existing Post Top Luminaire. Use in parks, along walkways, roadways and areas where a distinctive nostalgic theme is prevalent.

SPECIFICATION FEATURES

- Saves money by not having to purchase new fixtures
- PROVEN 100,000 hours QL induction rated life
- Instant ON and instant re-strike with back-to-full brightness feature
- CRI >80 White light no color shift
- Available in 3000K, 4000K and 5000K
- Power factor >.90
- Economic, environment-friendly lighting in situations with long burning hours
- 2-level dimming generator 50% power reducer to save energy during inactive times. Works with 0-10V control and sensor system.
- Available in 100-120V or 200-277V
- Input frequency – 50/60Hz; No audible noise rating
- Power factor >.90
- UL Listed

GLOBE

- Clear or frosted acrylic refractor
- Type V distribution, optimized for efficient light performance
- Improves downlight efficiency and eliminates uplight pollution
- Metalized reflector available to comply with Dark Sky
- Designed for pole height between 10 and 20 feet
- Overall weight is reduced for easy installation and maintenance
- Decorative black plastic finial
- 5-year limited warranty
- Made in the U.S.A.

ORDERING INFORMATION and SELECTION

Model No.	Wattage	Lamp Kelvin	Voltage	Base	Refractor	Reflector
PTLR	55	830	100-120	8"	Clear (C)	Metalized (M)
	85	840	200-277	9"	Frosted (F)	
		850				

Part Number Example: PTLR/85/830/120/9C/M

Description: PowerLux iLaurel Induction Retrofit Kit 85W 3000K, 100-120V, 9" Clear Refractor, Metalized Reflector, Black Finial

PowerLux® Corporation

U.S. Manufacturer of Sustainable Energy Efficient Lighting Products
Induction Lighting Proven Success Since 1999

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766
Website: www.powerlux.com E-mail: klpowerlux@gmail.com

PowerLux® Products Have Stood the Test of Time!

140318
Patents pending
Specifications subject to change without prior notice
© 2010 by PowerLux® Corporation. All rights reserved