


PowerLux® iMini-Triangle WallPack™ Induction Luminaire

Catalog#		Type
Project		
Note		Date
Prepared by		



55W Induction 100-120V, 200-277V

FIXTURE DIMENSIONS

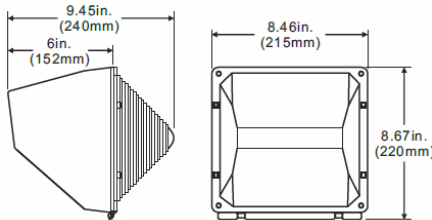

IES FILE PHOTOMETRIC DATA

Available upon request

PACKING DATA

Carton size: 10" x 9" x 9" Weight: 9 lbs

**PROVEN QL INDUCTION LIGHTING
TECHNOLOGY WORLDWIDE SINCE 1992**

APPLICATIONS

For parking areas, walkways, loading docks, tunnels, entrances, underpasses, recreation areas, area lighting, wall washing and urban lighting

SPECIFICATION FEATURES

- Proven 100,000 hours rated lamp life
- Instant ON and instant re-strike with back-to-full brightness feature
- CRI >80 White light no color shift, no flickering
- Power factor >.90
- 2-level dimming ballast 50% power reducer to save energy during inactive times. Works with 0-10V control
- Thermally engineered for sustainable operation designed according to local temperatures
- Die-cast aluminum housing with powder coated bronze paint finish
- Removable and hinged borosilicate glass lens assembly
- Silicon rubber gasket
- Aluminum reflector designed for maximum photometric efficiency and optimum light distribution
- Cut-off Visor complies with Dark Sky compliance
- UL listed for wet location
- Ingress protection IP65
- Perfect replacement for HPS and MH HID light sources
- Overall weight is reduced for easy installation and maintenance
- Manufactured in the U.S.A.


ACCESSORIES



Visor



Wire Guard



Vandal Shield

ORDERING INFORMATION

Model No.	Wattage	Lamp Kelvin	Voltage	Accessories
PMTWP	55	830	100-120V	Visor (V)
		840	200-277V	Wire Guard (WG)
		850		Vandal Shield (VS)

Part Number Example: PMTWP/55/840/120

Description: PowerLux iMini-Triangle WallPack Induction Luminaire 55W 4000K 100-120V

PowerLux® Corporation

U.S. Manufacturer of Sustainable Energy Efficient Lighting Products
Induction Lighting Proven Success Since 1999

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: www.powerlux.com E-mail: klpowerlux@gmail.com

PowerLux® Products Have Stood the Test of Time!

131007
Patents pending
Specifications subject to change without prior notice
© 2010 by PowerLux® Corporation. All rights reserved