


PowerLux® Corporation

12in Round Open Frame Wall Pack LED Luminaire


Catalog#		Type
Project		
Note		Date
Prepared by		



FIXTURE DIMENSIONS:

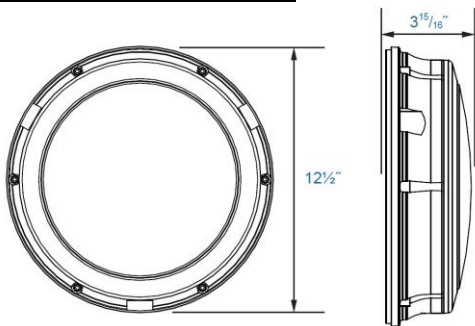

PHOTOMETRIC DATA:

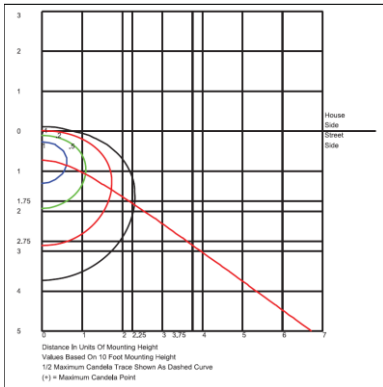

APPLICATIONS

For parking areas, walkways, loading docks, tunnels, entrances, underpasses, recreation areas, area lighting, and urban lighting

HOUSING FEATURES:

- Die cast aluminum housing & open front frame with gasket
- Textured architectural bronze powder coat finish over a chromatic conversion coating
- Available in Bronze. Custom colors upon request

LENS:

LumaLens Polycarbonate Opal Lens

Mounting:

Surface Mount

Distribution:

Type IV

LED ARRAY FEATURES:

- Array lumens: 2539
- Delivered lumens: 1674
- CRI: 82
- CCT: 5000K
- Rated Life: 50,000 hours
- 5-Year warranty

WATTAGE:

- Array: 17W, System: 19.7W

LED DRIVER:

Dimmable Electronic Driver, 120-277V, 50/60Hz

Listing & Rating

- CSA: Listed for wet locations , Wall Mount Only
- ADA compliant
- IP67

Assembled in the USA

ORDERING INFORMATION

Model No.	Color	Wattage	CCT	Input Voltage	Additional Options
PLED12ROFWP	B=Bronze	17W	5000K	120-277V	SF= Single Fuse DF=Double Fuse

Part Number Example: PLED12ROFWP/B/17/5000K/120-277/SF

Description: PowerLux LED 12in Round Open Frame Wall Pack, Bronze, 17W, 5000 Kelvin, 120-277V with Single Fuse

PowerLux® Corporation

U.S. Manufacturer of Sustainable Energy Efficient Lighting Products

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: www.powerlux.com E-mail: klpowerlux@gmail.com

PowerLux® Products Have Stood the Test of Time!

Based on prevailing model. Efficiency of the LED driver and efficacy of LED modules are ever improving. Please contact [PowerLux®](http://www.powerlux.com) for latest updated information.

160323
 Patents pending
 Specifications subject to change without prior notice
 © 2015-2016 by PowerLux® Corporation. All rights reserved