


PowerLux® Corporation

14in Round Open Frame Wall Pack LED Luminaire


Catalog#		Type
Project		
Note		Date
Prepared by		



FIXTURE DIMENSIONS:

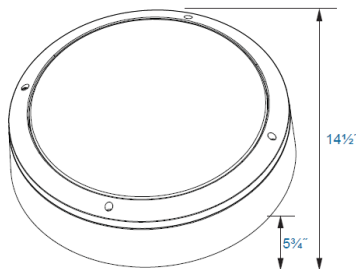

PHOTOMETRIC DATA:

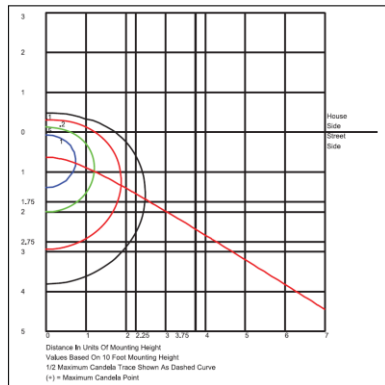

APPLICATIONS

For parking areas, walkways, loading docks, tunnels, entrances, underpasses, recreation areas, area lighting, and urban lighting

HOUSING FEATURES:

- Die cast aluminum housing & open front frame with gasket
- Textured powder coat finish over a chromate conversion coating
- Available in Bronze or White. Custom colors upon request

LENS:

LumaLens Polycarbonate Opal Lens

Mounting:

Surface Mount

LED ARRAY FEATURES:

- Array lumens: 3249
- Delivered lumens: 1550
- CRI: 85
- CCT: 5000K
- Rated Life: 50,000 hours
- 5-Year warranty

WATTAGE:

- Array: 22.7W, System: 27.2W

LED DRIVER:

Dimmable Electronic Driver, 120-277V, 50/60Hz **OR** 347/480V, 50/60Hz

Listing & Rating

- CSA: Listed for wet locations , Wall Mount Only

Assembled in the USA

ORDERING INFORMATION

Model No.	Color	Wattage	CCT	Input Voltage	Additional Options
PLED14ROFWP	B=Bronze W=White	23W	5000K	120-277V 347/480V	SF= Single Fuse DF=Double Fuse

Part Number Example: PLED14ROFWP/B/23/5000K/120-277/SF

Description: PowerLux LED 14in Round Open Frame Wall Pack, Bronze, 23W, 5000 Kelvin, 120-277V with Single Fuse

PowerLux® Corporation

U.S. Manufacturer of Sustainable Energy Efficient Lighting Products

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: www.powerlux.com E-mail: klpowerlux@gmail.com

PowerLux® Products Have Stood the Test of Time!

Based on prevailing model. Efficiency of the LED driver and efficacy of LED modules are ever improving. Please contact PowerLux.com for latest updated information.

160323
Patents pending
Specifications subject to change without prior notice
© 2015-2016 by PowerLux® Corporation. All rights reserved