


PowerLux® Architectural LED Roadway Luminaire

| | | |
|-------------|--|------|
| Catalog# | | Type |
| Project | | |
| Note | | Date |
| Prepared by | | |



FIXTURE DIMENSIONS

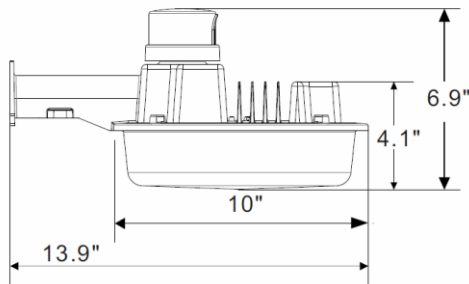

IES FILE PHOTOMETRIC DATA

Available upon request

PACKING DATA

Carton size: 10"x 5" x 15" Weight 15 lbs

APPLICATIONS

Parking lots, streets, warehouse, residential areas, walkways, underpasses, factory, gas station, loading docks

SPECIFICATION FEATURES

- Heavy-duty corrosion resistant die-cast metal construction with UV resistant power coat finish (available in bronze or gray)
- Sturdy mounting arm installs to walls or poles
- NEMA approved photocontrol included
- DLC pending

LED SYSTEM FEATURES

- Highest quality long life LEDs
- Thermally designed for long life using Cree LED
- Single source LED
- 40W (system wattage), 2900 delivered lumens
- Efficacy: 73lm/w
- Low starting temp -30°C
- CRI > 75
- Color temperature 5000K
- Precise optical arrangement for optimal photometric
- IC current controlled LED circuits

5-year limited manufacturer warranty

ORDERING INFORMATION

| Model No. | Wattage | Lumens | Color Temp | Input Voltage |
|------------------|----------------|---------------|-------------------|----------------------|
| PLEDARDD | 40 | 2900 | 5000K | 120-277V |
| | | | | |

Part Number Example: PLEDARDD/2900/750/120-277

Description: PowerLux Architectural LED Roadway Luminaire, 40W, 2900lm, 5000K, 120-277V



PowerLux® Corporation

U.S. Manufacturer of Sustainable Energy Efficient Lighting Products

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: www.powerlux.com E-mail: klpowerlux@gmail.com

Based on prevailing model. Efficiency of ballast and efficacy of LED modules are ever improving. Please contact PowerLux® for latest updated information.

PowerLux® Products Have Stood the Test of Time!

140430
Patents pending
Specifications subject to change without prior notice
© 2011 by PowerLux® Corporation. All rights reserved