


PowerLux® Architectural LED Roadway Luminaire

Catalog#		Type
Project		
Note		Date
Prepared by		



FIXTURE DIMENSIONS

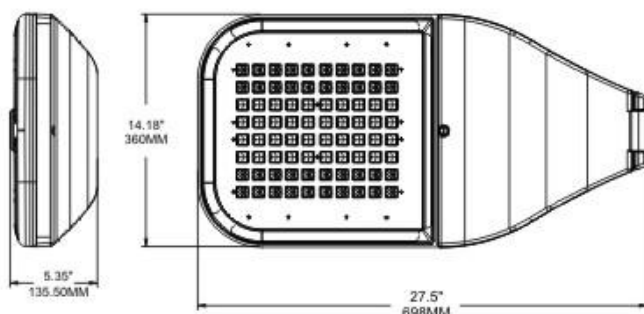

IES FILE PHOTOMETRIC DATA

Available upon request

ORDERING INFORMATION

Model No.	Wattage/Lumens	CCT	Input Voltage	Optional Switching
PLEDAR	92W/5842	4700K	120-277V	PER=Receptacle PEP= Photocell
	150W/9262			
	179W/11257			

Part Number Example: PLEDAR/150/9262/747/120-277

Description: PowerLux Architectural LED Roadway Luminaire 150W, 9262 lumens, 4700K, 120-277V

PowerLux® Corporation

U.S. Manufacturer of Sustainable Energy Efficient Lighting Products

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: www.powerlux.com E-mail: klpowerlux@gmail.com

APPLICATIONS

For streets, parks, or for general illumination

SPECIFICATION FEATURES

- Energy-efficient roadway fixture
- Slim and sweeping-curve design provides low wind resistance
- Die-cast aluminum housing; powder coated finish
- Patented centerpiece is designed to maximize heat dissipation from the LED light engine
- "BodyGuard" finish - 5-year limited warranty on paint
- OD 1 5/8" and 2 3/8" poles
- Optional receptacle and photo control
- 5-year limited manufacturer warranty

LED SYSTEM FEATURES

- Highest quality long life LEDs
- Thermally designed for long life using Cree LED
- Available in:
 - 92W (system wattage), 5842 delivered lumens
 - 150W (system wattage), 9262 delivered lumens
 - 179W (system wattage), 11257 delivered lumens
- CRI > 75
- Color temperature 4700K
- IC current controlled LED circuits

Assembled in the USA