


PowerLux® Architectural LED Wall Lighting Luminaire

Catalog#		Type
Project		
Note		Date
Prepared by		



Front view

FIXTURE DIMENSIONS

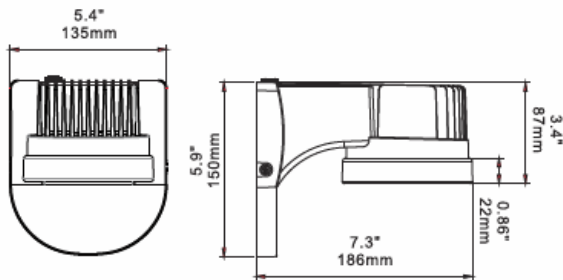

IES FILE PHOTOMETRIC DATA

Available upon request

PACKING DATA

Carton size: 9"x 6" x 7" Weight 10 lbs

APPLICATIONS

For hotels, entry-ways, condos, apartments and porches

SPECIFICATION FEATURES

- Suitable for indoor and outdoor use
- Corrosion resistant die-cast aluminum housing with superior powder coat finish
- Draft angle for water to run-off
- Anti-glare polycarbonate frosted lens
- Stainless steel hardware
- DLC pending
- IP65
- Optional photocontrol

LED SYSTEM FEATURES

- Highest quality long life LEDs
- Thermally designed for long life using Cree LED
- 14W (system wattage), 910 delivered lumens
- Efficacy: 65lm/w
- Low starting temp -30°C
- CRI > 75
- Color temperature 5000K
- Input voltage: 120-240V AC
- IC current controlled LED circuits



Side view

ORDERING INFORMATION

Model No.	Wattage	Lumens	Color Temp	Input Voltage
PLEDAWL	14	910	5000K	120-240V

Part Number Example: PLEDAWL/910/750/120-240

Description: PowerLux Architectural LED Wall Lighting Luminaire 14W, 910lm, 5000K, 120-240V



PowerLux® Corporation

U.S. Manufacturer of Sustainable Energy Efficient Lighting Products

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: www.powerlux.com E-mail: klpowerlux@gmail.com

Based on prevailing model. Efficiency of ballast and efficacy of LED modules are ever improving. Please contact [PowerLux®](http://www.powerlux.com) for latest updated information.

PowerLux® Products Have Stood the Test of Time!

140430
Patents pending
Specifications subject to change without prior notice
© 2011 by PowerLux® Corporation. All rights reserved