


# PowerLux® Architectural LED Wall Mount Luminaire



## FIXTURE DIMENSIONS

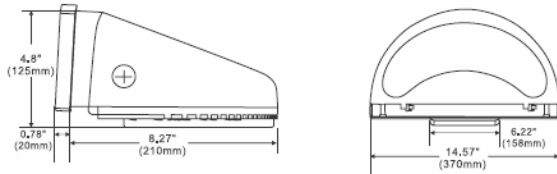

## IES FILE PHOTOMETRIC DATA

Available upon request

## PACKING DATA

Carton size: 16" x 8" x 12" Weight 14 lbs

## ORDERING INFORMATION

Model No.	Wattage	Lumens	Color Temp	Input Voltage
PLEDAWM9	40	3300	4700K	120-277V

Part Number Example: PLEDAWM9/3300/747/120-277

Description: PowerLux Architectural LED Wall Mount Luminaire 40W, 3300lm, 4700K, 120-277V

Catalog#		Type
Project		
Note		Date
Prepared by		

## **APPLICATIONS**

For parks, warehouse, hotels, entry-ways, apartments and hallway


## **SPECIFICATION FEATURES**

- Full cut-off wall mount
- Die-cast aluminum housing with bronze UV resistant powder coat finish
- High impact resistant polycarbonate lens
- Quick mounting plate with bubble leveling device included
- DLC pending
- IP65

## **LED SYSTEM FEATURES**

- Highest quality long life LEDs
- Thermally designed for long life using Cree LED
- 40W (system wattage), 3300 delivered lumens
- Efficacy: 83lm/w
- Low starting temp -30°C
- CRI > 75
- Color temperature 4700K
- Input voltage: 120-277V AC
- IC current controlled LED circuits

5-year limited manufacturer warranty

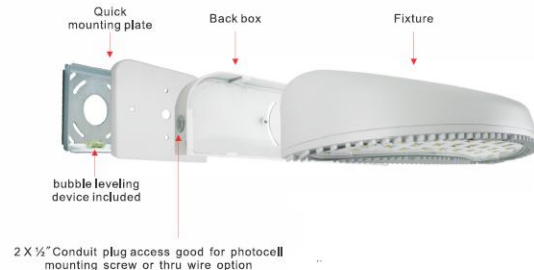

## **PowerLux® Corporation**

**U.S. Manufacturer of Sustainable Energy Efficient Lighting Products**

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: www.powerlux.com E-mail: klpowerlux@gmail.com

Based on prevailing model. Efficiency of ballast and efficacy of LED modules are ever improving. Please contact PowerLux for latest updated information.

**PowerLux® Products Have Stood the Test of Time!**

140430  
Patents pending  
Specifications subject to change without prior notice  
© 2011 by PowerLux® Corporation. All rights reserved