


PowerLux® LED

Mini WallPack Luminaire



FIXTURE DIMENSIONS

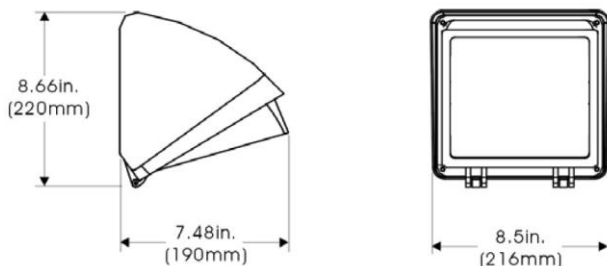

IES FILE PHOTOMETRIC DATA

Available upon request

PACKING DATA

Carton size: 16" x 11" x 10" Weight 11 lbs

ORDERING INFORMATION and SELECTION

Model No.	1100 Lumen Module	1500 Lumen Module	2000 Lumen Module	3000 Lumen Module
PLEDMWP	10W/2700K	16W/2700K	22W/2700K	34W/2700K
	10W/3000K	14W/3000K	21W/3000K	32W/3000K
	10W/3500K	14W/3500K	20W/3500K	30W/3500K
	9W/4000K	13W/4000K	19W/4000K	28W/4000K

Part Number Example: PLEDMWP/1100/840/120-277

Description: PowerLux LED Mini WallPack Luminaire 9W 1100lm 4000K 120-277V

PowerLux® Corporation

U.S. Manufacturer of Sustainable Energy Efficient Lighting Products

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: www.powerlux.com E-mail: klpowerlux@gmail.com

Catalog#		Type
Project		
Note		Date
Prepared by		

APPLICATIONS

For parking areas, walkways, loading docks, tunnels, entrances, underpasses, recreation areas, area lighting, wall washing and urban lighting

SPECIFICATION FEATURES

- Dark Bronze die-cast aluminum housing with powder coated finish
- Heat resistant and tempered frosted glass lens
- Silicone rubber gasket
- ½" tapped holes available for installing photocell (photocell optional)
- UL listed for wet locations
- Perfect replacement for HPS and MH HID light sources
- Modular system with replaceable components design for easy service
- Manufactured in the U.S.A.

LED SYSTEM FEATURES

- Designed for 50,000 hours operation
- Lumen output: 1100, 1500, 2000 and 3000 lumen
- Comfortable superior quality LED light
- Optimized light mixing chamber
- Instant ON and instant re-strike with back-to-full brightness feature
- CRI > 80 White light (2700K, 3000K, 3500K and 4000K)
- Universal voltage 120-277V
- Thermally engineered for sustainable operation designed according to local climate
- 5 year system warranty