


PowerLux® Corporation

Oval Wall Cylinder


LED Luminaire



FIXTURE DIMENSIONS:

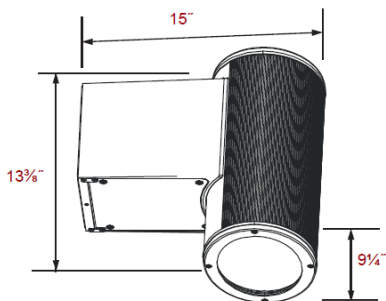

PHOTOMETRIC DATA

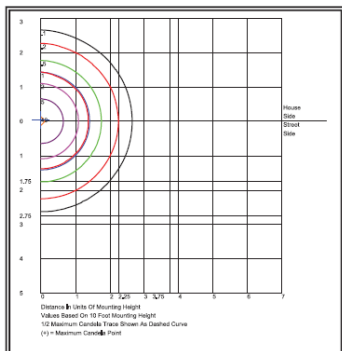

Catalog#		Type
Project		
Note		Date
Prepared by		

APPLICATIONS

For parking areas, walkways, entrances, recreation areas, area lighting, and urban lighting

HOUSING FEATURES:

Extruded oval aluminum housing, die cast aluminum ballast housing, choice of black, white or bronze powder coat finish over a chromate conversion coating, hinged ballast compartment for easy wiring access.

Extruded housing can be reversed to create an upright.

LENS:

Clear flat glass lens or clear flat prismatic glass lens

Mounting:

Mounts over a 4" recessed outlet box includes easy-hang "Two Hands Free" wall mounting bracket

LED ARRAY FEATURES:

- Array lumens: 3189
- Delivered lumens: 2797
- CRI: 85
- CCT: 5000K
- Rated Life: 50,000 hours
- 5-Year warranty

SYSTEM WATTAGE:

- Array 22.7W, System 25W

LED DRIVER:

Dimmable Electronic Driver, 120-277V, 50/60Hz OR 347/480V, 50/60Hz
Optional 2.5KV Surge Protector

Listing & Rating

- CSA: Listed for wet locations
- DLC Listed as: **WCSQF1X23U5KC**

Assembled in the USA

ORDERING INFORMATION

Model No.	Color	Lens	Wattage	CCT	Input Voltage	Additional Options
PLEDOWC	BK= Black BZ= Bronze WH= White	G=Clear Glass P=Clear Prismatic Glass	23W	5000K	120-277V 347/480V	SP= 2.5KV Surge Protector

Part Number Example: PLEDOWC/BK/P/23/5000K/120-277V/SP

Description: PowerLux LED Oval Wall Cylinder, Black, Clear Prismatic Glass, 23W, 5000 kelvin, 120-277V LED Electronic Driver, and 2.5KV Surge Protector

PowerLux® Corporation

U.S. Manufacturer of Sustainable Energy Efficient Lighting Products

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: www.powerlux.com E-mail: klpowerlux@gmail.com

Based on prevailing model. Efficiency of ballast and efficacy of LED modules are ever improving. Please contact PowerLux.com for latest updated information.

PowerLux® Products Have Stood the Test of Time!

151117
Patents pending
Specifications subject to change without prior notice
© 2015 by PowerLux® Corporation. All rights reserved