PowerLux® Corporation

LED Bollard Series

Round Dome Top with IES Type V Glass Refractor

Catalog#		Type
Project		
Note		Date
Prepared by		

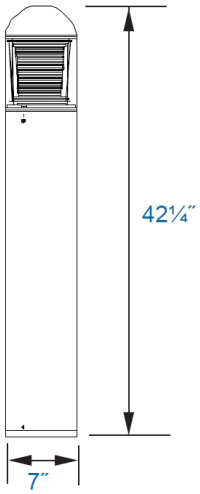

Bollard can be cut to custom length upon request

Photometrics

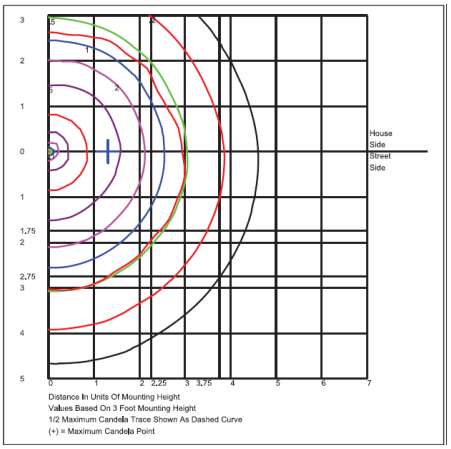

APPLICATIONS
For walkways, parks and yards

HOUSING FEATURES:
- *Extruded aluminum housing with flush mounting base & vandal resistant screws*
- *Powder coat finish over a chromate conversion coating*
- *Available colors: Black, Bronze, White. Custom colors available upon request*

LENS:
Clear Polycarbonate Lens

INTERNAL REFRACTOR:
IES Type V clear prismatic borosilicate glass refractor

Mounting:
Mounting kit with 8" anchor bolts (included)

LED ARRAY FEATURES:
- *Medium beam spread LED optics*
- *Array Lumens: 2,089*
- *Delivered Lumens: 1,022*
- *CRI: 83*
- *CCT: 4000K, 5000K*
- *Rated Life: 50,000 hours*
- *5-Year warranty*

SYSTEM WATTAGE:
- *Array: 14.5W*
- *System: 17W*

LED DRIVER:
- *Dimmable Electronic Driver, 120-277V, 50/60Hz*
- *Optional Surge Protector*
- *Optional Single fuse or Double fuse*

LISTING AND RATING:
- *CSA: Listed for wet location*
- *IP65*

Assembled in the USA

ORDERING INFORMATION

Model No.	Color	Wattage	CCT	Lumen Output	Input Voltage	Additional Options
PLEDBO-RD5	B= Black Z= Bronze W= White	15=15W	4K=4000K 5K=5000K	1022	U=120-277V	SP=Surge Protection SF=Single Fuse DF=Double Fuse

PACKING DATA:
Carton Size: 9"x9"x45"
Weight: 15Lbs

Part Number Example: PLEDBO-RD5/B/15/4K/1022/U/SP
Description: PowerLux LED Bollard, Round with Dome Top, IES Type V Glass Refractor, Black housing, 15W, 4000 Kelvin, 1022 Lumens, 120-277V, and Surge Protection

PowerLux® Corporation
U.S. Manufacturer of Sustainable Energy Efficient Lighting Products
1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766
Website: www.powerlux.com E-mail: klpowerlux@gmail.com

PowerLux® Products Have Stood the Test of Time!

Based on prevailing model. Efficiency of the LED Driver and efficacy of LED modules are ever improving. Please contact PowerLux® for latest updated information.

160406
Patents pending