



# PowerLux® LED T-8 Direct Fluorescent Replacement (4 foot lamp)

**LED Direct Replacement Tube**  
**US Patent No. US 8,358,056 B2**



## Photometrics:

FL/T8-32W17W IU-500

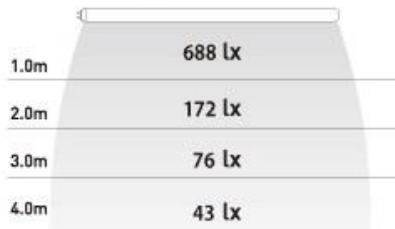

## ORDERING INFORMATION

Model No.	Lamp Type	Lamp Length	Wattage (W)	CCT	Lumen Output	Ballast Input Voltage
PLEDDFR	T8	4 foot	17	3500K	1800 [106 LPW]	120-277V
				4100K	1920 [113 LPW]	
				5000K		
			22	3500K	2350 [106 LPW]	
				4100K	2500 [113 LPW]	
				5000K		

Part Number Example: PLEDDFR/T8/4/17/850/1920/120-277

Description: PowerLux LED Direct Fluorescent Replacement, T8, 4 foot, 17W, 5000K, 1920 Lumens, 120-277V

Catalog#		Type
Project		
Note		Date
Prepared by		

Direct Replacement LED lamps plug right in to existing fluorescent T-8 fixtures, so there is no need to perform expensive, time consuming rewiring. Switching to LED's is as simple as changing a light bulb.

## LED SPECIFICATION FEATURES

- Ballast compatibility = Electronic Instant Start
- Plugs directly into existing fluorescent T-8 lamp fixtures
- Cuts energy usage by up to one half compared to traditional 32W fluorescent T-8's
- Environmentally friendly – no mercury, no UV or infrared light
- Frosted lens to make LED invisible; without hot spots or glare
- 110 degrees of clear, uniform, flicker-free illumination
- 50,000 hours rated lifetime
- Lamp Wattage = 17W, or 22W
- Lumen Output = see chart
- Efficacy = see chart
- CRI = >80
- CCT available: 3500K, 4100K, 5000K
- Input Voltage = 120-277V (depending on existing ballast)
- ETL listed
- DLC listed as: FL/T8-32W/17W IU 350, 410, 500  
FL/T8-32W/22W IU 350, 410, 500
- 5-year Limited Warranty

**Compatible Electronic Instant Start Ballast available.**  
**For other LED Lumen packages and dimmable options contact PowerLux for details**

## Warnings: Risk of shock or fire.

- Replace all fluorescent lamps as specified on the existing good working condition ballast wiring diagram.
  - Do NOT mix LED lamps and fluorescent lamps as they will not function properly.
  - Do not install the LED lamps if the ballast is not working properly or existing lamp holders are damaged.
- Contact a qualified electrician for replacement

PowerLux® Corporation

**U.S. Manufacturer of Sustainable Energy Efficient Lighting Products**

1260 Liberty Way, Suite E Vista, CA 92081 Phone: 760-727-2360 Fax: 760-434-4766

Website: [www.powerlux.com](http://www.powerlux.com) E-mail: [klpowerlux@gmail.com](mailto:klpowerlux@gmail.com)

**PowerLux® Products Have Stood the Test of Time!**

Distributed by PowerLux® Corporation  
 Based on prevailing model. Efficiency of ballast and efficacy of LED modules are ever improving. Please contact PowerLux® for latest updated information.

160226  
 Specifications subject to change without prior notice  
 © 2015-2016 by PowerLux® Corporation. All rights reserved